

HELITRONIC POWER

This is our most sold unit
around the world



Key parameters

Around the world, the HELITRONIC POWER stands for top quality in the production and resharping of rotationally symmetrical tools. Permissible diameters range from 3 to 320 mm, machining lengths can be up to 350 mm and each item may weigh up to 50 kg.



Grinding



Eroding



Laser



Measuring



Software



Customer Care

Walter Maschinenbau GmbH

WALTER has produced tool grinding machines since 1953. Today, our product range is supplemented by tool eroding machines and fully automated CNC measuring machines in the HELICHECK series for contactless complete measurement of tools and production parts.

Walter Maschinenbau GmbH is part of the UNITED GRINDING Group. Together with our sister company, Ewag AG, we consider ourselves to be a supplier of systems and solutions for the complete machining of tools and can offer a wide range of products, including grinding, rotary eroding, laser machining, measurement and software.

Our customer focus and our global sales and service network of company-owned locations and employees has been appreciated by our customers for decades.

HELITRONIC POWER

With up to six grinding wheels on the belt-driven spindle, the HELITRONIC POWER grinds complex geometries with only one clamping cycle. Together with the available loading systems, it sets standards in productivity and flexibility. Our customers appreciate these functions, which is why it is the best-selling WALTER tool grinding machine worldwide.



Grinding



Software

The HELITRONIC POWER at a glance

Application

- Grinding rotationally symmetrical tools for metalworking and woodworking industries
- For production and/or regrinding
- Fully automated, complete machining in a single clamping cycle
- Materials include HSS, carbide, cermet, ceramic

The machine

- Low vibration, solid grey cast iron, gantry type construction
- X, Y, Z linear axes with ball-type linear drive
- A, C rotating axes with worm drives
- Belt-driven spindle with two ends
- Each spindle end can take up to three grinding wheels
- FANUC, the global standard for control equipment
- A variety of automatic loading systems
- Options which increase efficiency



HELITRONIC POWER – the space-saving version with a belt-driven spindle and two ends.
The most economical solution for many production and regrinding companies.

Software


- HELITRONIC TOOL STUDIO, CAD/CAM software for design, programming, simulation and production
- Numerous software options to extend the system's performance and to increase its efficiency



HELITRONIC POWER with Robot loader - the high level, high-performance version for minimally-manned multi-shift operation and mid-large volumes.

Universal, efficient and easy to use


1

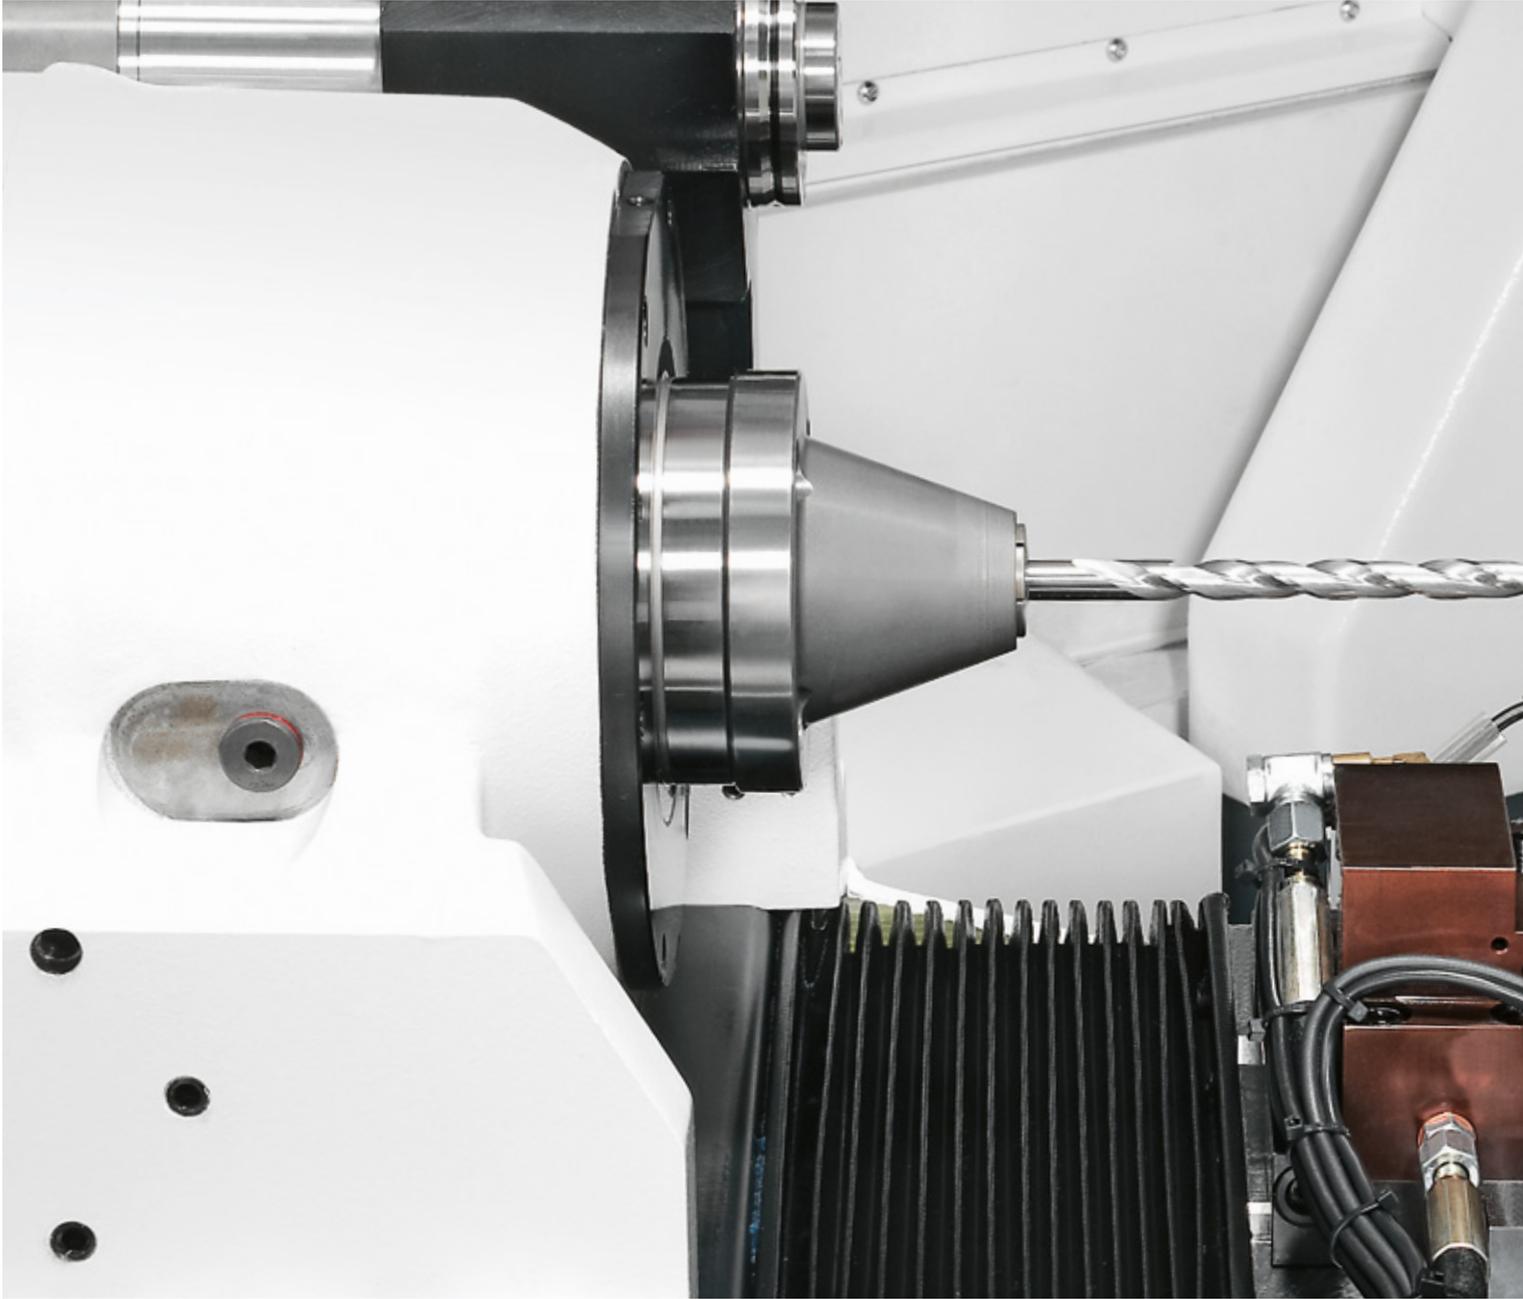

Example tools (from left to right):

Cylindrical end mill, stepped drill bit, fir tree cutter, ball nose tool with variable spiral lead, cylindrical drill, thread mill cutter, high spiral corner radius mill, Kevlar mill, profiled mill, single-point cutter



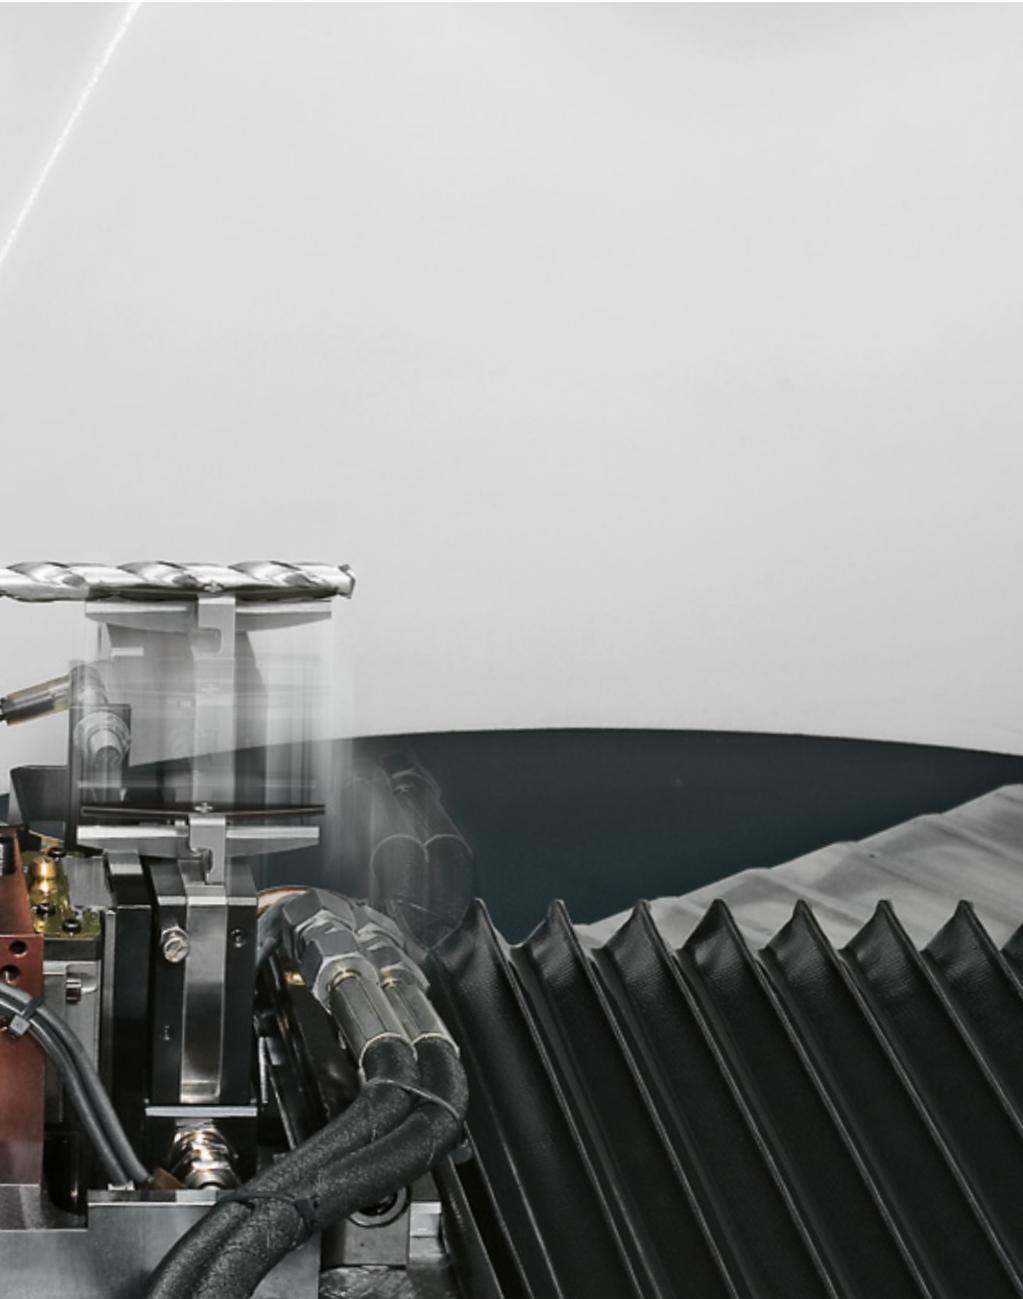

When producing or regrinding precision tools for metal and wood, the HELITRONIC POWER is used worldwide. Decades of tried and tested WALTER expertise in hardware, software and application knowledge come together in this machine. It offers numerous benefits in relation to cost reduction and is simultaneously an ideal CNC machine for all those who wish to set themselves up in the business of tool machining. Users will love the convenient and safe operation of the HELITRONIC POWER.

The area of application of the HELITRONIC POWER comprises the entire spectrum of rotationally symmetrical tools for metal and wood machining, including special tools. Even complex geometries can be machined in a single clamping cycle. A true all-rounder with thousand-fold, global acclaim.



Innovative WALTER grinding technology

1



WALTER gantry design


The WALTER gantry design with its excellent stability properties and extreme rigidity converts the high dynamism of the digital drives into low-vibration grinding precision.

Belt-driven spindle

The belt-driven spindle with two ends can take up to 6 grinding wheels. The different grinding wheel sets are allocated to the relevant spindle along with the wheel measurement data.

Automatic positioning and measuring system "Heli-Probe"

Heli-Probe measures important tool parameters for a perfectly positioned tool in the shortest space of time. This is the best precondition for quick and accurate grinding, quality and productivity.

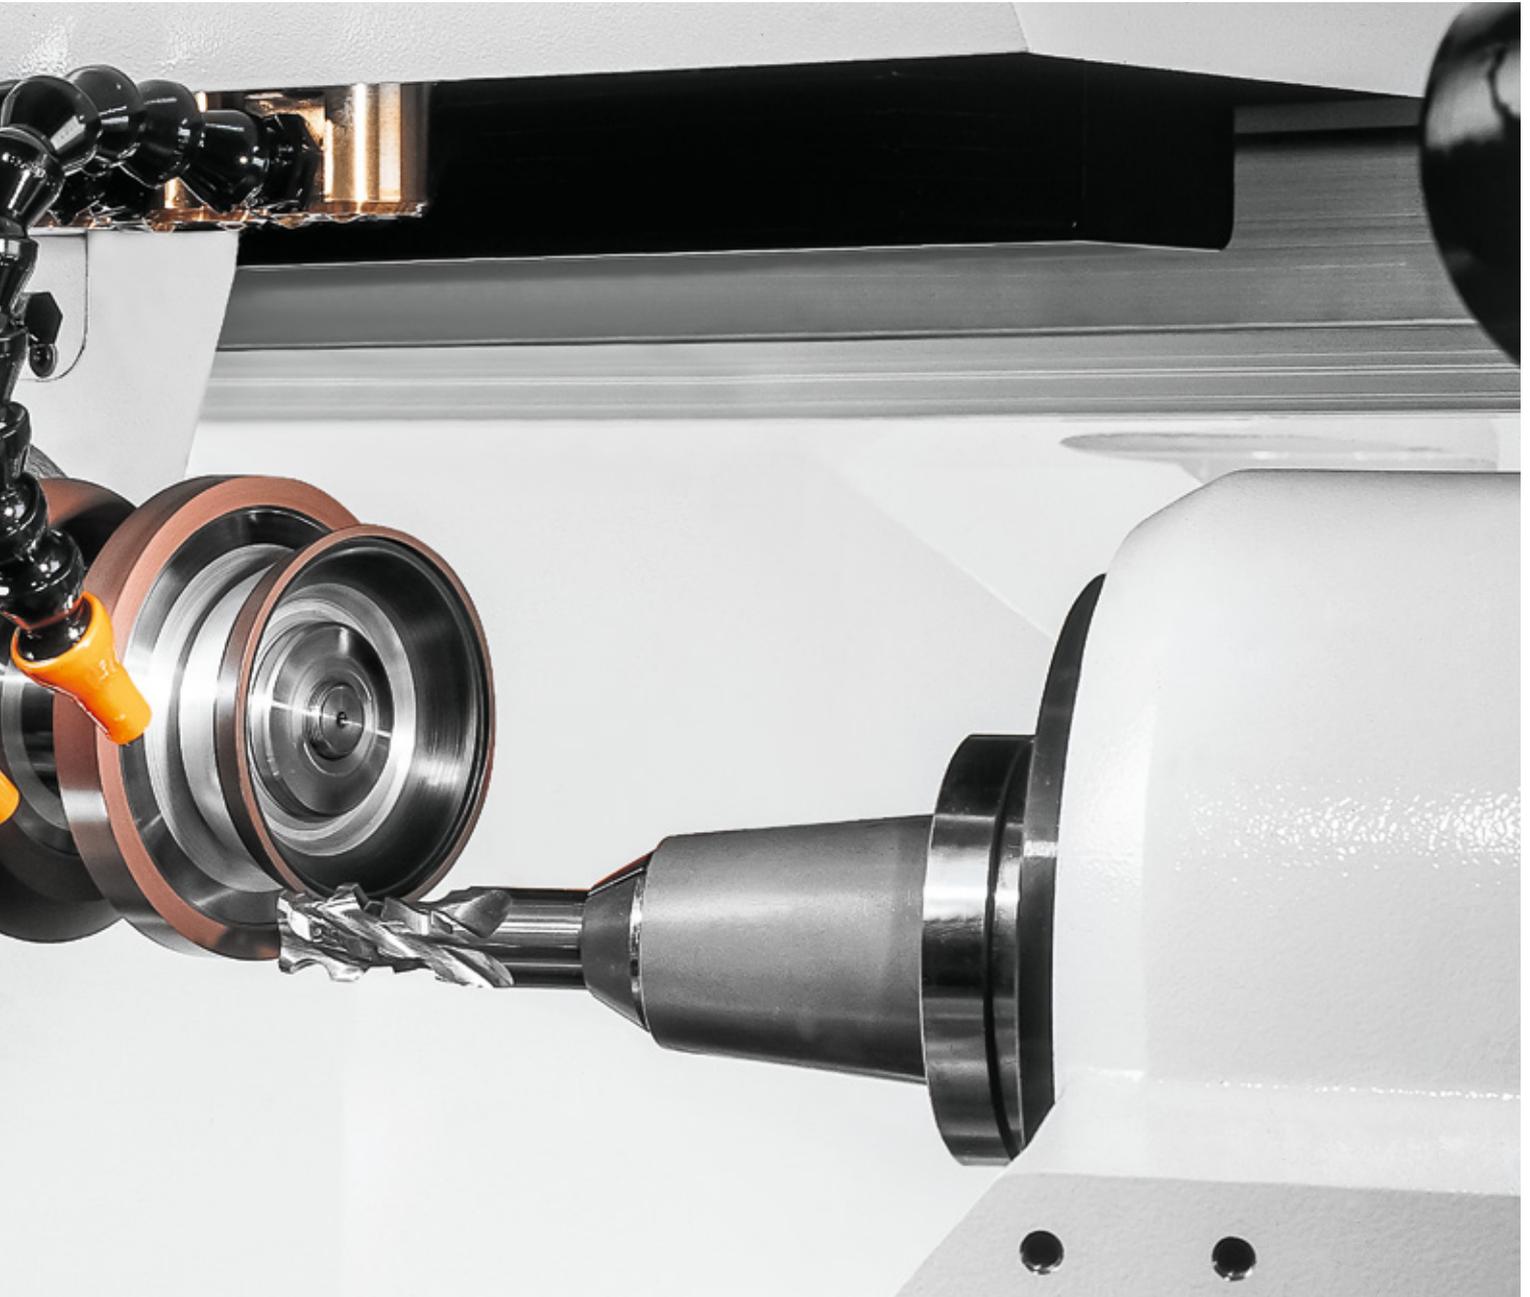**“Torque motor 750 rpm” option**

The torque motor on the A axis is an effective option to make the HELITRONIC POWER system more flexible and more productive. At 750 rpm, the torque motor is ideal for the high demands of the most complex tool types. Profile grinding is no longer a problem with this option.

“Glass scales” option


All linear axes are equipped with glass scales. The greater precision that results is fully implemented into grinding precision.

Automation options



Robot loader

The robot improves accessibility to the workpieces and makes special applications possible. Depending on the type of workpiece or the workpiece diameter, up to 7,500 workpieces can be loaded using the robot.

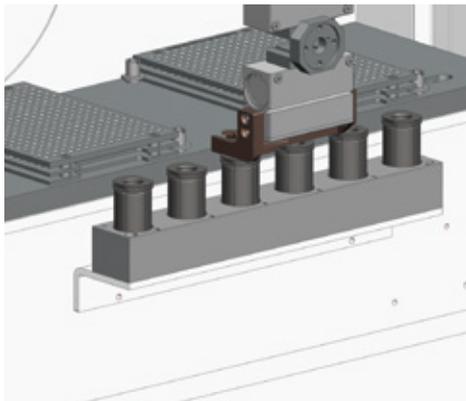

"Multi-Range" equipment package for robot loaders

The Multi-Range equipment package sets new standards in terms of flexibility. Large diameter coverages with a pair of gripper fingers and a collet replacement (Schunk bayonet) are possible with this equipment package.



"Combi" equipment package for robot loaders

Gripper rapid replacement system for handling cylindrical tools and tools with HSK-63 mounting shank. The word "Combi" is an exact description of the contents of this equipment package: Namely the two equipment packages "Cylindrical tools" and "HSK" plus the rapid replacement interface for fast, user-friendly retooling.

Advantages of the "Combi" equipment package

- Rapid replacement sequence thanks to only one cylinder head screw
- Pallets that have already been taught do not need to be taught again when grippers are replaced
- Pneumatics and teaching cable need to be connected only once (installation)
- Retrofitting at existing robots possible (software must be adapted)
- Easy handling
- Ergonomic form



Chain loader 300plus

The chain loader with an HSK interface is designed for 70 tools up to a diameter of 63 mm, or 35 tools up to a diameter of 160 mm, or 21 tools up to a diameter of 320 mm. This is a globally unique system for the production and resharpening of rotationally symmetrical tools.




Eco loader/Eco loader plus

With up to 20 tool positions as an Eco Loader. Also possible as an Eco Plus loader with up to 165 tool positions. The Eco Loader is mounted on the work table. The gripper is integrated into the grinding head. Preferred use is with single pieces and small series. This proximity to the grinding unit means short auxiliary process times. All loader functions are coordinated by the machine control unit. An effective automation measure for large and small businesses.

1



2

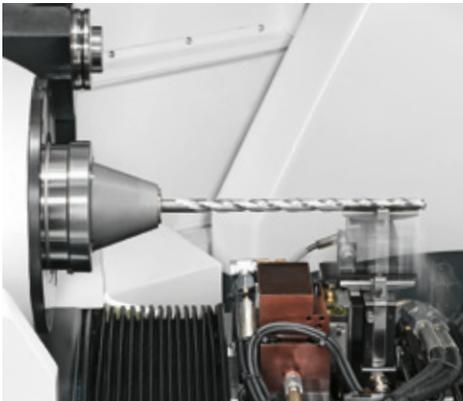

Heli Contour Check HCC

Machine-integrated camera measurement system for measuring the tool contour directly after grinding, without re-chucking the tool for very high degrees of accuracy. This way the measured contour errors can be directly adjusted.

Automated work table

The automated work table option can be equipped with up to two upper slides: one automatic and one permanent. This way, long tools can be supported by a moveable steady rest and/or a tailstock. The surface quality and tool precision is increased thanks to the constant support at the contact point of the grinding wheel.

Automatic grinding wheel measurement

For even more efficient production. Normally the machine operator corrects the grinding wheel data in the production process manually so that the geometry of the tool can be maintained at its nominal dimension. With the automatic grinding wheel measurement, the wear on the bond of the grinding wheels can be determined automatically via tactile measurement, exactly documented and compensated for. The measurement is carried out during the production process. Diameter and length of the grinding wheel can be measured and compensated for. This means that the operator always has the optimum grinding wheel data at the desired time. Furthermore, the user can monitor the grinding wheel wear and thus influence the production process and optimise it.

The probe for the tactile measurement is fitted on the tool carrier and is mounted in place of the electrical dresser.


Automatic, electrical measurement of the machine reference (AEMDM)

Now use the advantages of the automatic, electrical measurement of the machine reference in the grinding and eroding machines from WALTER.

Advantages of AEMDM

- Maximum precision of measurement results through exact positioning of the axes via electrical contact
- Significant time savings with automatic operation in comparison to the manual measurement method
- Valuable working time of the employees can be used for other tasks
- Eliminates errors caused by the human factor
- Short amortisation time for your investment

Application software for tool machining

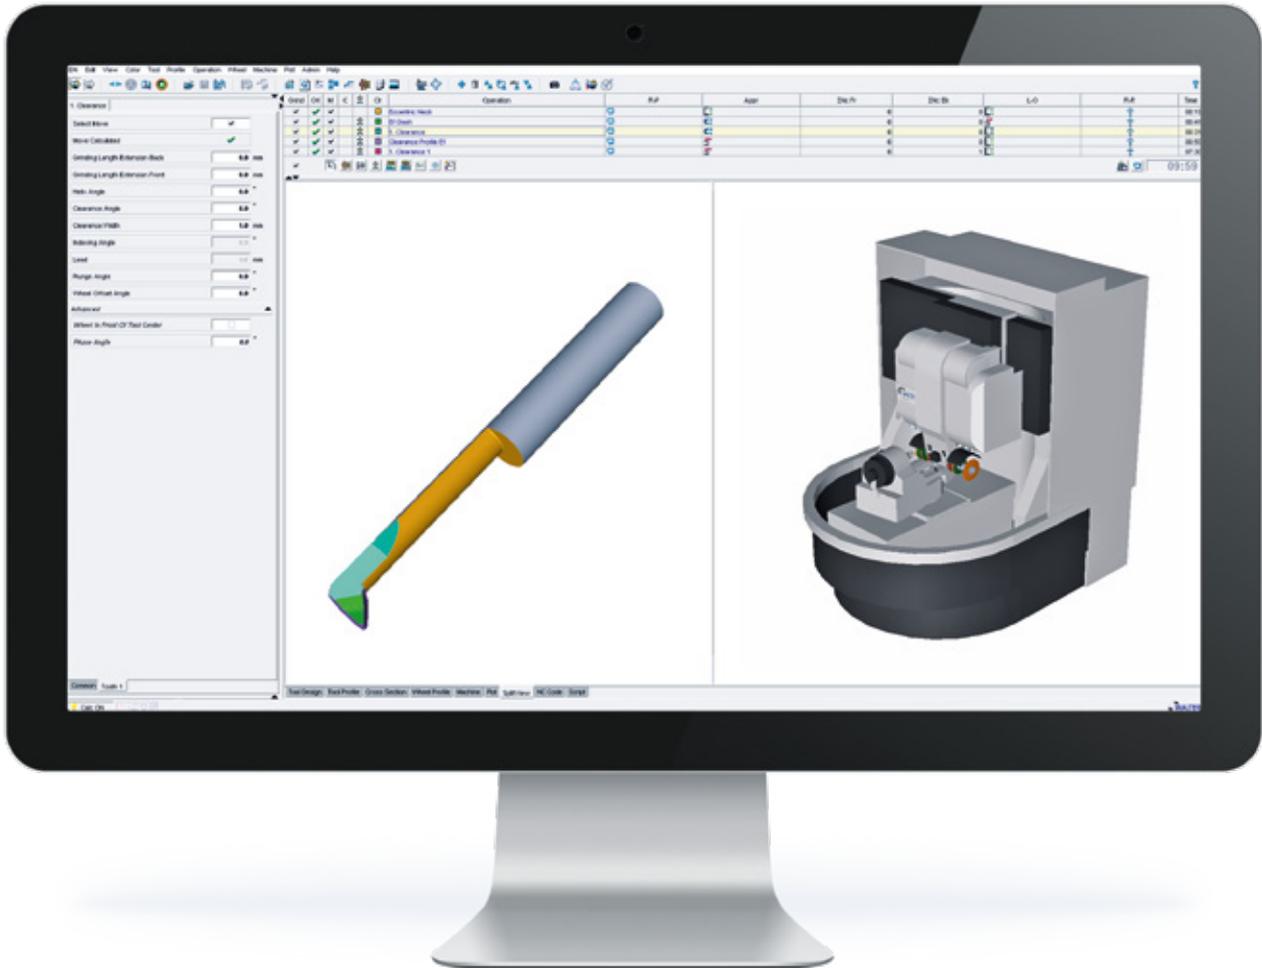

HELITRONIC TOOL STUDIO adds operational convenience to all grinding applications

HELITRONIC TOOL STUDIO is the WALTER way to the perfect tool. According to the tried and tested method of "What you see is what you grind", just a few mouse clicks are all that separate you from producing the perfect precision tool: Design, programming, simulation and production.

HELITRONIC TOOL STUDIO: This combines ease of programming with the greatest possible flexibility. With minimum complexity, machining steps and movement sequences for both rotationally symmetrical standard tools

and for special tools can be programmed by the operator. The tool shown on the screen corresponds exactly to the tool which will then be produced. This means that, as early as the design phase, the result can be checked and, if necessary, corrected thanks to the true-to-life 3D simulation.

The operator can quickly find the tool type, the parameters to be entered and the tool by using the assistant. WALTER provides programme packages for all standard tool families, which make handling significantly easier.

Efficiency options

- Up to 30 % time savings
- Optimum feed rate
- Optimize existing IDNs

Feedrate Optimizer

This enhancement to the HELITRONIC TOOL STUDIO provides the ideal options for feed control and for monitoring the grinding wheel and machine load. Depending on the tool type, the time savings can be up to 30 %. Feed optimisation uses the findings entered into the HELITRONIC TOOL STUDIO in relation to grinding movements, and the grinding wheel and tool simulation model in order to calculate the current grinding wheel and machine loads and set the optimum feed at any time. Movements with low wheel loads will be accelerated and, this is particularly important, movements where the desired wheel load is exceeded are slowed down. Even existing IDNs can be conveniently optimised with just one click. First, the profile of the grinding wheel load is determined via a progressive simulation analysis. Then, the feed is optimised in such a way that the wheel load remains constant during the entire processing run.

- Permanent set-actual comparison for the torque

Adaptive control

By permanently comparing the machine loading, grinding can be made more efficient and simultaneously safer. If the load increases, the feed will be decelerated accordingly. If the load decreases, the speed is increased accordingly. With AC grinding, alternating loads on the grinding wheels will be prevented by a continual load. Any possible overloading of the grinding wheels is excluded.

- Analysis of the centre of gravity
- Balancing the tool

Tool Balancer

The "Tool balancer" is an easy way to analyse, and balance out if necessary, centre-cutting tools with an odd number of flutes (unevenly divided tools) or special tools. The efficiency-increasing method has two core functions: One is to analyse the centre of mass and the other is to automatically balance the tool using different techniques. The approach is simple and can be mastered with just a few mouse clicks. Analysis during the development phase means that the process of prototype production can be significantly shortened. Balanced tools have a longer tool life, can machine at higher speeds, produce higher-quality surfaces and result in less wear-and-tear. Asymmetrical tools are well-suited to machining processes with high rotation speeds up to a point where significant imbalance forces occur.

- Determination of the rake angle, the outer diameter and the core diameter for cylindrical tools

Integrated Measuring System IMS

With the integrated IMS measurement system, the outside diameter, rake angle and core diameter can be measured using the probe ball without having to unclamp the tool. By setting the tolerances, HELITRONIC TOOL STUDIO can compensate for any deviation of the measured values, e.g. by thermal growth or wheel wear-and-tear, and adjust to the nominal measure and thus prevent scrap. The operator no longer needs to make active adjustments and the dressing cycle of the grinding wheels remains constant. Both increase the efficiency, especially when it comes to large-volume production.



Global standard of control technology



- Multi-processor system – high system security
- FANUC bus for digital drives – fault-free communication
- CNC and robots from a single manufacturer – no interface problems
- 19-inch touchscreen as standard

With the FANUC control unit, WALTER relies on the global standard of control technology. For the user, this means the highest degree of reliability, availability and operating comfort.

WALTER, famous for tool machining, and FANUC, the No. 1 in CNC control units, together make an unbeatable team.

Customer Care

WALTER and EWAG deliver systems and solutions worldwide for all areas of tool machining. Our claim is based on ensuring maximum availability of our machines over their entire service life. For this we have thus bundled numerous services in our customer care program.

From “Start up” through “Prevention” to “Retrofit”, our customers enjoy tailor made services for their particular machine configuration. Around the world, our customers can use helplines, which can generally solve a problem using remote service. In addition to that, you will also find a competent service team in your vicinity around the world. For our customers, this means:

- Our team is close by and can quickly be with you.
- Our team will support you to improve your productivity.
- Our team works quickly, focuses on the problem and its work is transparent.
- Our team solves every problem in the field of machining tools, in an innovative and sustainable manner.



Start up
Commissioning
Extension of the guarantee




Qualification
Training
Support for production



Prevention
Maintenance
Inspection



Service
Customer service
Customer advice
Helpline
Remote service



Material
Spare parts
Replacement parts
Accessories



Rebuild
Machine overhauling
Refurbishing of assemblies



Retrofit
Conversions
Retrofitting parts
Taking machines back

Technical data, dimensions

Mechanical axes

X axis	460 mm
Y axis	320 mm
Z axis	660 mm
Rapid traverse speed X, Y, Z	max. 15 m/min
C axis	± 200°
A axis	∞
Linear resolution	0.0001 mm
Radial resolution	0.0001°

Grinding spindle drive

Belt-driven spindle (standard)

Max. grinding wheel diameter	200 mm
Grinding spindle speed	0 – 10,500 rpm
Spindle ends	2
Tool holder	NCT
Peak power	11.5 kW
Spindle Diameter	80 mm

High-performance belt-driven spindle with 24 kW (optional)

Max. grinding wheel diameter	200 mm
Grinding spindle speed	0 – 7,000 rpm
Spindle ends	2
Tool holder	NCT
Peak power	24 kW
Spindle Diameter	80 mm

Others

Machine weight	approx. 4,200 kg
Power consumption at 400 V/50 Hz	approx. 25 kVA

Coolant system

Tank capacity	approx. 480 l
Pump	120 l/min at 6 bar

Tool data¹⁾

Min. tool diameter	3 mm
Max. tool diameter	320 mm
Max. tool diameter with automated work table	290 mm
Max. workpiece length, peripheral grinding ²⁾	350 mm
Max. workpiece length, end face grinding ²⁾	280 mm
Max. workpiece weight	50 kg

Options

Coolant system


On request – several types are possible

Loading systems

Eco loader/Eco loader plus, Chain loader 300plus, Robot loader

Others

Frequency-controlled pump 80 – 120 l/min at 7 – 20 bar, double spindle with 24 kW peak power, torque motor 750 rpm, glass scales, high frequency spindle, Heli Contour Check HCC, automation upper plate, Walter Window Mode software, automatic grinding wheel measurement, automatic, electrical measurement of the machine reference, etc.

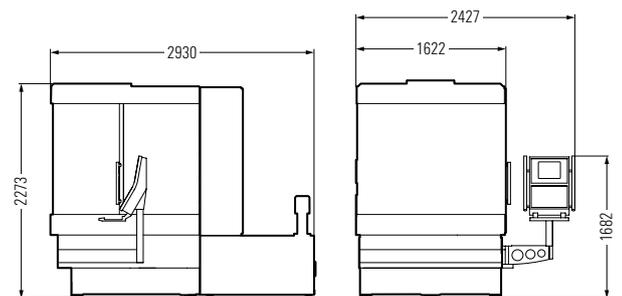

HELITRONIC POWER

¹⁾ The maximum tool dimensions depend on the type of tool and its geometry, as well as the type of machining.

²⁾ From the theoretical taper diameter of the workpiece holder.

Measurements in mm. Subject to modifications due to technical progress and errors. We accept no responsibility for the correctness of any information given.

Creating Tool Performance

WALTER and EWAG are globally acting market-oriented technology and service companies, and are system and solution partners for all areas of tool machining. Our range of services is the basis for innovative machining

solutions for practically all tool types and materials typical for the market with a high degree of added value in terms of quality, precision, durability and productivity.



Grinding – Grinding of rotationally symmetrical tools and workpieces

WALTER machines	Use	Materials	Tool dimensions ¹⁾ max. length ²⁾ / diameter
HELITRONIC ESSENTIAL	P R	HSS TC C/C CBN	255 mm / Ø1 – 100 mm
HELITRONIC MINI POWER	P R	HSS TC C/C CBN	255 mm / Ø1 – 100 mm
HELITRONIC MINI AUTOMATION	P R	HSS TC C/C CBN	255 mm / Ø1 – 100 mm
HELITRONIC BASIC	P R	HSS TC C/C CBN	350 mm / Ø3 – 290 (320) mm
HELITRONIC POWER	P R	HSS TC C/C CBN	350 mm / Ø3 – 290 (320) mm
HELITRONIC POWER 400	P R	HSS TC C/C CBN	520 mm / Ø3 – 315 mm
HELITRONIC VISION 400 L	P R	HSS TC C/C CBN	420 mm / Ø3 – 315 mm
HELITRONIC VISION 700 L	P R	HSS TC C/C CBN	700 mm / Ø3 – 200 mm
HELITRONIC MICRO	P R	HSS TC C/C CBN HSS TC C/C CBN	120 mm / Ø0.1 – 12.7 mm 120 mm / Ø3 – 12.7 mm

EWAG machines	Use	Materials	Tool dimensions ¹⁾ max. length ²⁾ / diameter
EWAMATIC LINEAR	P R	HSS TC C/C CBN PCD	200 mm / Ø0.2 – 200 mm
PROFILE LINE	P R	HSS TC C/C CBN	255 mm / Ø1 – 100 mm
WS 11/WS 11-SP	P R M	HSS TC	– / up to Ø25 mm
RS 15	P R M	HSS TC C/C CBN PCD	– / up to Ø25 mm



Eroding – Electrical discharge machining and grinding of rotationally symmetrical tools

WALTER machines	Use	Materials	Tool dimensions ¹⁾ max. length ²⁾ / diameter
HELITRONIC DIAMOND EVOLUTION	P R	HSS TC C/C CBN PCD	185/255 mm / Ø1 – 165 mm
HELITRONIC POWER DIAMOND	P R	HSS TC C/C CBN PCD	350 mm / Ø3 – 290 (400) mm
HELITRONIC POWER DIAMOND 400	P R	HSS TC C/C CBN PCD	520 mm / Ø3 – 380 mm
HELITRONIC VISION DIAMOND 400 L	P R	HSS TC C/C CBN PCD	420 mm / Ø3 – 315 mm



Software – The intelligence of tool machining and measuring for production and regrinding



Customer Care – Comprehensive range of services



Grinding – Grinding of indexable inserts

EWAG machines	Use	Materials	Indexable inserts ¹⁾ Inscribed / circumscribed circle
EWAMATIC LINEAR	P R	HSS TC C/C CBN PCD	Ø3 mm / Ø50 mm
PROFILE LINE	P R	HSS TC C/C CBN	Ø3 mm / Ø50 mm
COMPACT LINE	P R	HSS TC C/C CBN PCD	Ø3 mm / Ø50 mm
INSERT LINE	P R	HSS TC C/C CBN	Ø3 mm / Ø75 mm
RS 15	P R M	HSS TC C/C CBN PCD	– / up to Ø25 mm



Laser – Laser machining of indexable inserts and/or rotationally symmetrical tools

EWAG machines	Use	Materials	Tool dimensions ¹⁾ max. length / diameter
LASER LINE ULTRA	P R	TC C/C CBN PCD CVD-D MCD/ND	250 mm / Ø0.1 – 200 mm
LASER LINE PRECISION	P R	CBN PCD CVD-D MCD/ND	250 mm / Ø0.1 – 200 mm

EWAG machines	Use	Materials	Indexable inserts ¹⁾ Inscribed / circumscribed circle
LASER LINE ULTRA	P R	TC C/C CBN PCD CVD-D MCD/ND	Ø3 mm / Ø50 mm
LASER LINE PRECISION	P R	CBN PCD CVD-D MCD/ND	Ø3 mm / Ø50 mm



Measuring – Contactless measurement of tools, workpieces and grinding wheels

WALTER machines	Use	Tool dimensions ¹⁾ max. length / diameter
HELICHECK PRECISION	M	420 mm / Ø1 – 320 mm
HELICHECK ADVANCED	M	420 mm / Ø1 – 320 mm
HELICHECK PRO	M	300 mm / Ø1 – 200 mm
HELICHECK PRO LONG	M	730 mm / Ø1 – 200 mm
HELICHECK PLUS	M	300 mm / Ø0.1 – 200 mm
HELICHECK PLUS LONG	M	730 mm / Ø0.1 – 200 mm
HELICHECK 3D	M	420 mm / Ø3 – 80 mm
HELISET PLUS	M	400 mm / Ø1 – 350 mm
HELISET	M	400 mm / Ø1 – 350 mm

Use: P Production R Regrinding M Measuring

Materials: HSS High speed steel TC Tungsten carbide C/C Cermet/ceramics CBN Cubic boron nitride PCD Polycrystalline diamond CVD-D Chemical vapour deposition MCD/ND Monocrystalline diamond/natural diamond

¹⁾ Maximum tool dimensions are dependent on the tool type and geometry, as well as the type of machining.

²⁾ From the theoretical taper diameter of the workpiece holder.



Walter Maschinenbau GmbH
Jopestr. 5 · 72072 Tübingen, Germany
Tel. +49 7071 9393-0
Fax +49 7071 9393-695
info@walter-machines.com

For worldwide contact details, please visit
www.walter-machines.com

